




RIGID COUPLING

SIZE	MAX. RPM	Torque NM	Finish Bore		ØA	ØB	C	D	G	L	Weight KG	Bolt Size & No. of
			Min	Max								
FRC 100	8000	575	10	45	120	70	45	15	3	93	4	M10 X 6
FRC 101	6300	1125	20	55	170	85	55	17	5	115	11	M12 X 6
FRC 102	5000	2690	30	70	185	110	70	17	5	145	15	M12 X 6
FRC 103	4000	4930	40	85	220	130	85	20	5	175	26	M16 X 6
FRC 104	3350	9200	50	105	250	160	105	20	5	215	40	M16 X 8
FRC 105	2800	14425	60	120	290	185	110	25	10	230	62	M18 X 8
FRC 106	2800	21890	75	140	320	215	125	25	10	260	86	M18 X 8
FRC 107	2100	37180	90	160	350	240	140	25	10	290	110	M20 X 10
FRC 108	1900	48900	105	185	380	285	155	25	10	320	140	M20 X 12
FRC 109	1700	61470	125	205	430	315	165	25	10	340	200	M24 X 10
FRC 110	1400	88750	140	240	490	370	180	25	10	370	270	M24 X 12

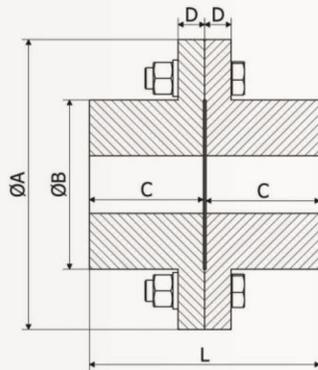

RIGID COUPLING