




## STAR SPACER COUPLING (RRL)

SIZE	BORE		ØA	B			C	L			APPROX WEIGHT		
	MIN	MAX									IN	KG.	
FSC 95	15	28	54	90	100		25	140	150		2.0	2.5	
FSC 100	15	35	65	90	100	140	30	150	160	200	3.0	3.5	4.3
FSC 110	20	42	85	90	100	140	35	160	170	210	5.8	6.3	8.0
FSC 150	20	48	96	90	100	140	45	180	190	230	8.5	9.0	11.0
FSC 190	30	55	115	90	100	140	51	192	202	242	12.5	13.5	16.0
FSC 225	40	60	127	90	100	140	57	204	214	254	16.5	17.5	21.0
FSC 226	40	65	130	100	140	180	60	220	260	300	23.2	27.5	32.0
FSC 276	40	75	157	100	140	180	60	220	260	300	34	40.3	46
FSC 280	40	85	190	100	140	180	65	230	270	310	52	61.2	70
FSC 295	40	100	231	100	140	180	65	230	270	310	77.3	91	104

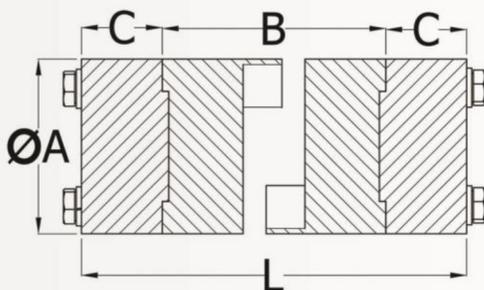

**STAR SPACER COUPLING**