





FLEXIBLE TYRE COUPLING


SIZE	TORQUE NM	MAX. SPEED	BORE		ØA	ØB	C	ØD	G	L	APPROX. WEIGHT KG.
			MIN.	MAX.							
FTC 40	64	4500	10	30	104	-	22	82	23	67	2.0
FTC 45	110	4500	10	32	120	-	25	94	23	73	2.2
FTC 50	160	4500	15	38	134	-	32	100	28	92	4.0
FTC 60	318	4000	15	48	165	-	38	125	36	112	5.0
FTC 70	487	3600	19	55	197	82	45	144	42	132	8.0
FTC 80	759	3100	25	60	211	95	51	167	47	149	12.0
FTC 85	915	3000	32	65	222	103	53	179	48	154	14.0
FTC 90	1096	2880	32	70	235	110	57	188	50	164	15.0
FTC 100	1517	2600	32	80	254	124	60	216	58	178	21.0
FTC 110	2137	2300	32	85	279	134	65	233	50	180	28.0
FTC 120	3547	2050	40	100	314	152	76	264	55	207	41.0
FTC 140	5642	1800	75	125	359	195	89	313	26	204	61.0
FTC 160	9339	1600	75	140	402	216	102	345	26	220	86.0
FTC 180	16455	1500	75	170	470	266	114	398	30	258	141.0
FTC 200	23508	1300	75	170	508	266	114	429	48	276	179.0
FTC 220	33125	1100	90	170	562	267	127	474	56	312	312.0
FTC 250	42740	1000	100	180	628	290	150	532	60	360	500.0

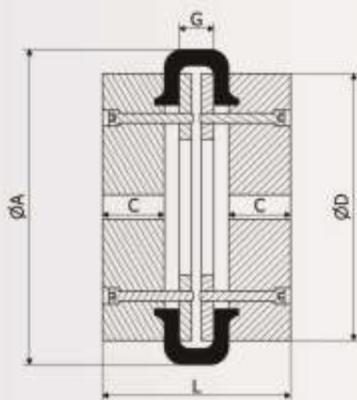

TYRE COUPLING 40-60

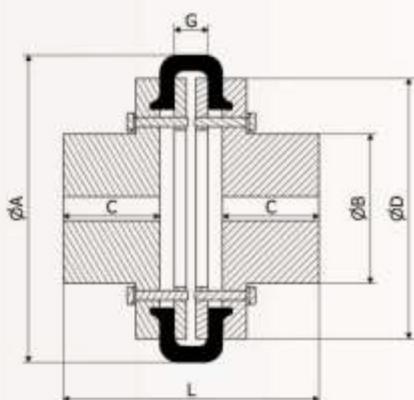

TYRE COUPLING 70-120

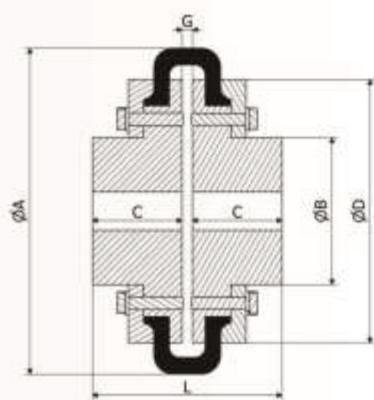

TYRE COUPLING 140-250