





CONTINUOUS SLEEVE COUPLING

SIZE	Torque	RPM	BORE		ØA	ØB	C	D	G	F	L	M	Weight Approx
			MIN.	MAX.									
FCSC 100	500	8000	10	32	85	50	45	57	3	18	93	75	2.800
FCSC 101	1000	6300	20	42	110	65	55	70	5	22.5	115	90	6.500
FCSC 102	2710	5000	25	55	128	85	70	76	5	34.5	145	100	11.500
FCSC 103	4900	4000	30	68	160	105	85	100	5	37.5	175	130	18.000
FCSC 104	9200	3350	40	85	185	130	105	110	5	52.5	215	150	32.000
FCSC 105	14300	2800	40	100	210	155	110	122	10	54	230	160	47.500
FCSC 106	21950	2500	40	110	240	175	125	142	10	59	260	190	67.000
FCSC 107	37250	2100	50	130	270	205	140	166	10	62	290	220	91.500
FCSC 108	49180	1900	60	150	300	230	155	176	10	72	320	240	132.000
FCSC 109	61500	1700	60	160	340	250	165	180	10	80	340	240	176.500
FCSC 110	88800	1400	60	200	400	310	180	200	10	85	370	270	269.000

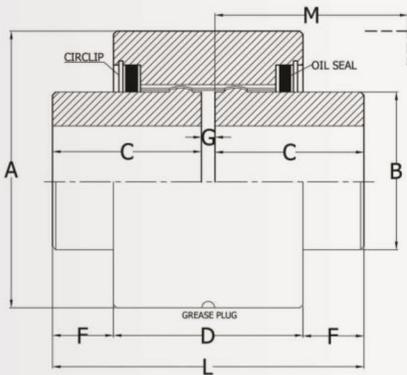

SIZE 100 - 104

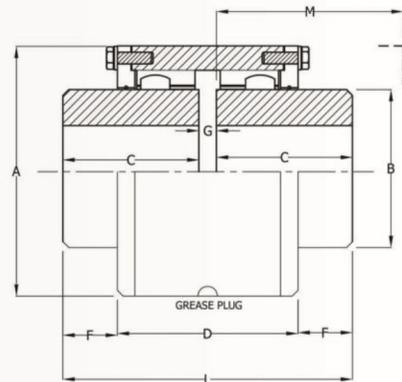

SIZE 105 - 110